


NEXT GENERATION 26 Product Specifications

Product	NeXT Generation 26
Color Options	Silk Silver Midnight Black Matte Gold
Full Length ⁽¹⁾⁽²⁾	18' (5.6m)
Cut Size Options ⁽³⁾	3' (1.0m) 4' (1.2m) 5' (1.5m) 10' (3.0m)
Width	4" (100mm)
Depth	1" (26mm)
Material	Anodized Aluminum
Applications	Indoor and Outdoor
Weight Load Capacity	10.2 tonne - medium duty
Features	<ul style="list-style-type: none"> • No bedding required • Joiners for easy extension • Easy roll out feature • Lifetime Rustproof Warranty • UV stable
Product Codes	See table on page 3

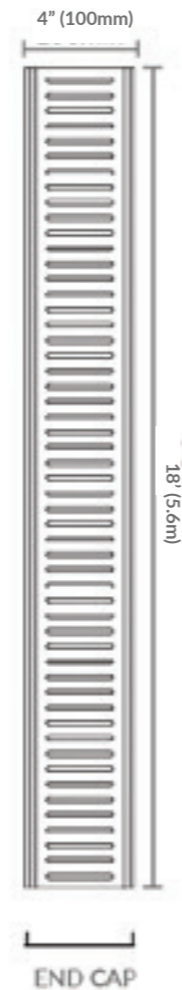

- ⁽¹⁾ Total length is 19' (5.8m), total usable length is 18' (5.6m) to allow for any wastage during the anodizing process.
- ⁽²⁾ Each full length includes a kit of: 5 pairs of end caps and 5 waste outlets.
- ⁽³⁾ 3', 4', and 5' cut size pieces include a kit of: 1 pair of end caps, 1 waste outlet, and 1 hole saw. 10' cut size pieces include a kit of: 3 pairs of end caps, 3 waste outlets, and 1 hole saw.

Waste outlets and hole saws come in 2" as standard size. 3" size available upon request.

Lauxes Grates products do not form part of the waterproofing
All Lauxes grates and accessories hold UPC Certification

CUTTING INSTRUCTIONS AND INSTALLATION


For ease of cutting Lauxes grates, we recommend using a compound miter saw fitted with a multi-material cutting blade 80 tooth or more. We also recommend using a Lauxes TCT hole saw to drill the hole for the waste outlet.

1. Cut the bottom tray 1/8" (3mm) shorter than desired length to allow end caps to be fitted.
2. Cut the top grate 1/32" (1mm) shorter than the bottom tray to allow for easy roll-in of top grate and tidy fit.

3. Using a suitable size Lauxes hole saw for your waste outlet, drill out the hole at the required position to align with the waste pipe in the floor.
4. Insert the end caps into bottom tray and secure with a bead of neutral cure silicone on the outside of tray.
5. Place silicone around the lip of the waste outlet and secure to the underside of bottom tray at the recently drilled hole.

* During installation use a template to ensure the grate does not come in contact with any wet cement based products.

** Regular, gentle cleaning with soapy water is recommended. Do not use abrasive cloths or acidic chemicals on the grates.

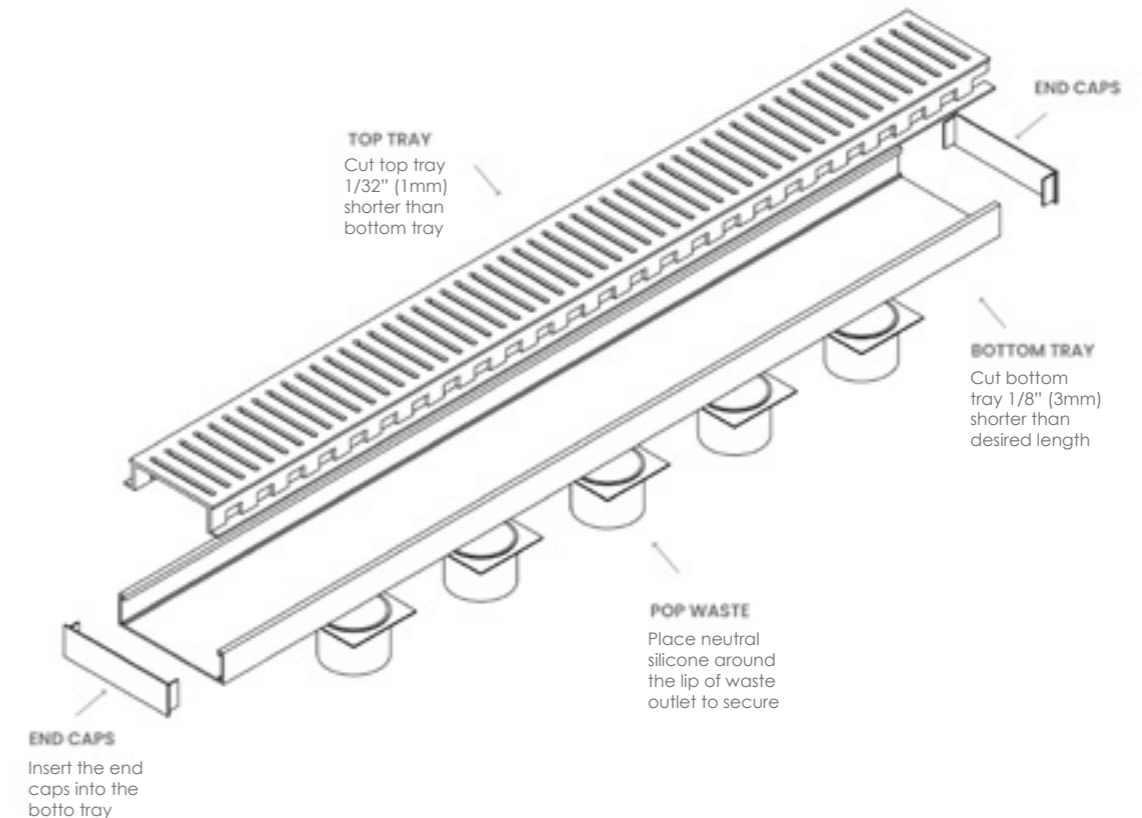

Grates to be installed by a licensed plumber
Measurements in inches are a close approximate

NEXT GENERATION 26 Product Codes for Easy Ordering

Color \ Length	Silk Silver	Midnight Black	Matte Gold
18' (5.6m) (full length)	LFGNXT26	LFGMNXT26	LFGMYGNXT26
10' (3.0m) (cut piece)	LFGNXT26K10F	LFGMNXT26K10F	LFGMYGNXT26K10F
5' (1.5m) (cut piece)	LFGNXT26K5F	LFGMNXT26K5F	LFGMYGNXT26K5F
4' (1.2m) (cut piece)	LFGNXT26K4F	LFGMNXT26K4F	LFGMYGNXT26K4F
3' (1.0m) (cut piece)	LFGNXT26K3F	LFGMNXT26K3F	LFGMYGNXT26K3F

For more technical information

scan the QR code



Warranty information and Care & Maintenance can be found at www.lauxesgrates.com

All Lauxes grates and accessories hold UPC Certification