


## PRODUCT SPECIFICATIONS

<b>Product</b>	Brushed Nickel NeXT Generation 14 (NXT14)
<b>Code</b>	LFGBNNXT14K5F
<b>Color</b>	Brushed Nickel
<b>Length</b>	5' (2.0m)
<b>Width</b>	4" (100mm)
<b>Depth</b>	9/16" (14mm)
<b>Material</b>	Anodised Aluminium
<b>Applications</b>	Indoor and Outdoor
<b>Features</b>	<ul style="list-style-type: none"> <li>• No bedding required</li> <li>• Thick as tile and glue</li> <li>• Anti-water tracking</li> <li>• Easy roll out feature</li> <li>• Lifetime Rustproof Warranty</li> </ul>

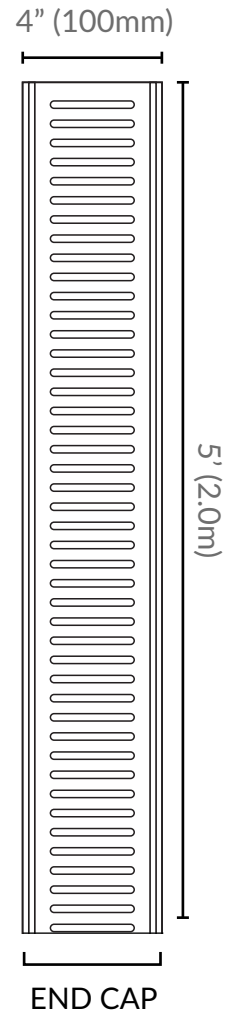

- \* Each kit comes complete with length of grate, 1 pair of end caps and 1 waste outlet.
- \* Regular, gentle cleaning with soapy water is recommended. Do not use abrasive cloths or acidic chemicals on the grates.

Warranty information and Care & Maintenance can be found at [www.lauxesgrates.com](http://www.lauxesgrates.com)


*Disclaimer:* All Lauxes grates and accessories hold UPC Certification.

# CUTTING INSTRUCTIONS AND INSTALLATION

For ease of cutting Lauxes grates, we recommend using a compound mitre saw fitted with a multi-material cutting blade 80 tooth or more. We also recommend using a Lauxes TCT hole saw to drill the hole for the waste outlet.

1. Cut the bottom tray 1/8" (3mm) shorter than desired length to allow end caps to be fitted.
2. Cut the top grate 1/32" (1mm) shorter than the bottom tray to allow for easy roll-in of top grate and tidy fit.
3. Using a suitable size Lauxes hole saw for your pop waste, drill out the hole at the required position to align with the waste pipe in the floor.
4. Insert the end caps into bottom tray and secure with a bead of silicone on the outside of tray.
5. Place silicone around the lip of the pop waste and secure to the underside of bottom tray at the recently drilled hole.

\* During installation use a template to ensure the grate does not come in contact with any wet cement based products.

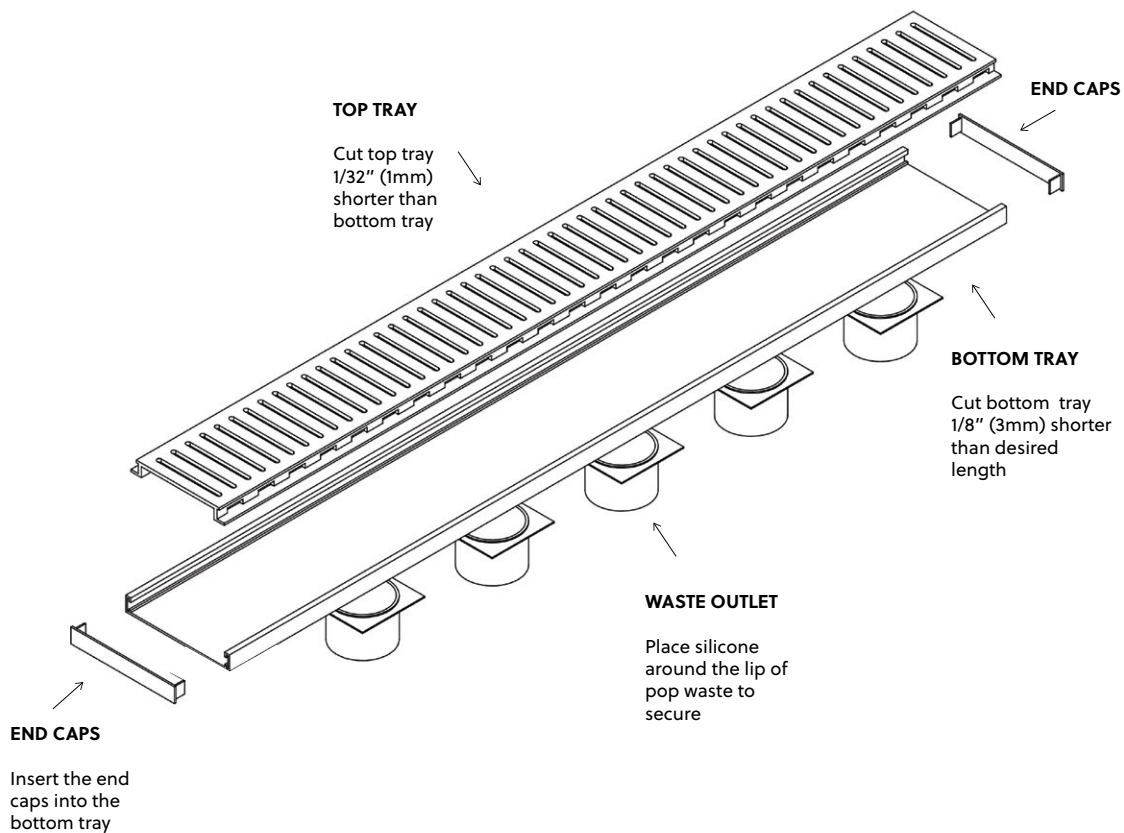

Grates to be installed by a licensed plumber.

\*\* Measurements in inches are a close approximate.